


# Easy Spec & Order Sheet

Please use cm for unit measurement.

## Spool Position:

Check One Box To Show Mounted Spool Position :

- (1) Front of Cab shield
- (2) Rear Positioned on Top of Cab Shield
- (3) Forward Positioned on Box Top/Behind Cab Shield

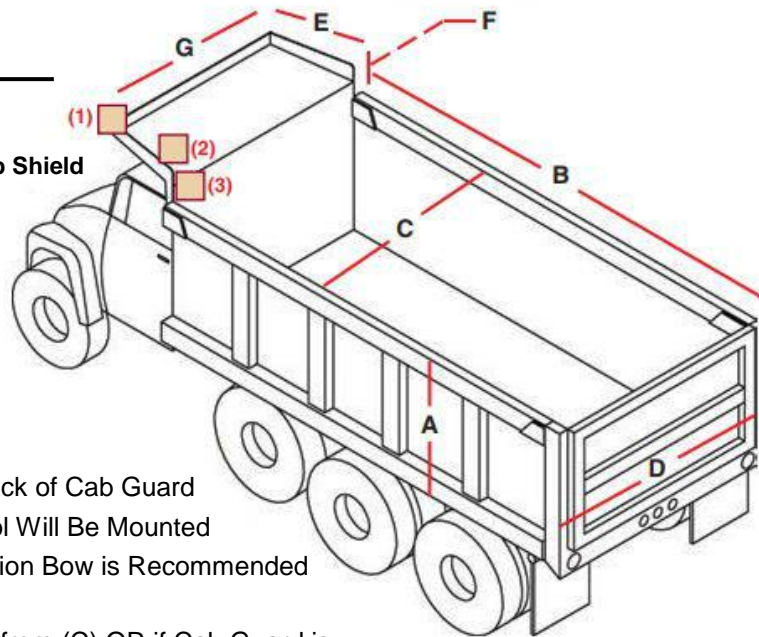

**Box:** \_\_\_\_\_ = (A) Height  
 \_\_\_\_\_ = (B) Length  
 \_\_\_\_\_ = (C) Width (inside)  
 \_\_\_\_\_ = (D) Outside Width of Widest Point  
 - If Tailgate is Over 254 cm

**Cab Shield:** \_\_\_\_\_ = (E) Length -OR- Distance From Back of Cab Guard to Where Spool Will Be Mounted  
 \_\_\_\_\_ = (F) Rise: -If 20.32 cm or More, Tension Bow is Recommended  
 \_\_\_\_\_ = (G) Front Width  
 \*\*If Width Varies Considerably from (C) OR if Cab Guard is Tapered, Please Contact Us.

**Tarp Size:** \_\_\_\_\_ Width (Generally Should Be Slightly Less Than (C) Box Width)

(Required) \_\_\_\_\_ Length = \_\_\_\_\_ + \_\_\_\_\_ + \_\_\_\_\_ + 60.96 cm  
 (B) (E) (F)

**Pivot Spings:**

### Determining Spring Capacity:

Above tarp length calculation and your tarp material determines the number of springs your system requires

General Aggregate (Mesh) Tarp Applications							
3m	3.7m	4.3m	4.9m	5.5m	6.1m	6.7m	7.3m
3-Spring			4-Spring			5-Spring	

Asphalt (Solid) Tarp Applications							
3m	3.7m	4.3m	4.9m	5.5m	6.1m	6.7m	7.3m
4-Spring				5-Spring			

Please Note: All Solid Tarp Fabrics Should be Tied Down.

## TarpMaster® Tarp Systems:

**System:** \_\_\_\_\_ **A. Roll-Rite, Super Duty Tarp System**

Part #

\_\_\_\_\_ **B. Roll-Rite Tarp Selection (specify by part number)**

Part #

To ensure accuracy, order for custom tarps (flapped, etc.) must be accompanied by an approved drawing.

**OR Select by Component:**

\_\_\_\_\_ **1. Select a Tarp Spool**

Part #

\_\_\_\_\_ **2. Select a Pivot Set**

Part #

\_\_\_\_\_ **3. Select a Bow Set**

Part #

\_\_\_\_\_ **4. Roll-Rite Tarp Selection (specify by part number)**

Part #

To ensure accuracy, order for custom tarps (flapped, etc.) must be accompanied by an approved drawing.

**Add** \_\_\_\_\_ **Options/Recommendations:**

**Ons:**

\_\_\_\_\_ Tension Bow

Part #

\_\_\_\_\_ 30° or 45° Tarp Bow Offsets

Part #

\_\_\_\_\_ 10620 Contact Plates

Part #